

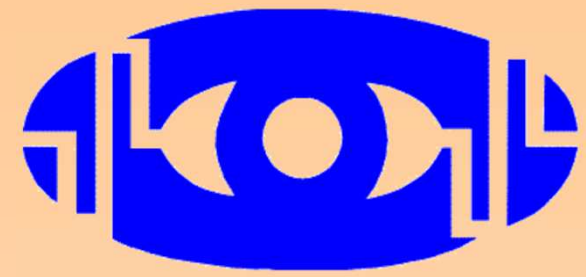



Video Solutions Ltd



Video Overlay Generator

- Two video inputs
- Composite video or Y/C inputs and output
- High resolution 768 x 576 pixels (CCIR PAL format)
- Software switchable between CCIR-PAL and EIA-NTSC
- Fixed single Reticule
- Moveable single crosshairs
- Moveable twin crosshairs
- Twin crosshairs with measurement
- Moveable Triple crosshairs
- Moveable Reticule and 2 concentric boxes
- Moveable Reticule and 2 concentric circles
- White / black reticules
- Solid or a selection of dashed reticules
- Left – Right screen split
- Top – Bottom screen split
- Moveable line of text
- Horizontal / Vertical image mirror / flip
- 4 stored setups
- Powers up with setup-1
- Mouse driven (PS2)
- Unit to be remote from mouse, power and cabling
- Feature rich hierarchical menu
- BNC (Composite video) input and outputs
- MiniDIN (Y/C video) input and outputs
- Low power
- Uses double insulated power source to eliminate earthing issues
- User replaceable power source (12V, 1A) and mouse
- Configurable logic processor
- ARM CPU



VSL 201

Video Solutions Ltd, 109 Cranham Drive, Worcester. WR14 9LZ www.videosolutions.ltd.uk

Registered in England and Wales No. 04751888